


Debinder TFE (BDF Assembled in China)

Specially developed for BASF-Feedstock, the plant concept of the TFE series is suitable for MIM parts debinding. In the process chain following this furnace, our customers apply batch sinter furnaces or small pusher furnaces (PTS). The parts are put onto lot frames, which are charged into the furnace. The furnace cycle operates program-based. Its particular exhaust gas post-combustion TNV renders the furnace environment-friendly. These furnaces are very popular on the Chinese market. Therefore, we manufacture them at our plant in China.

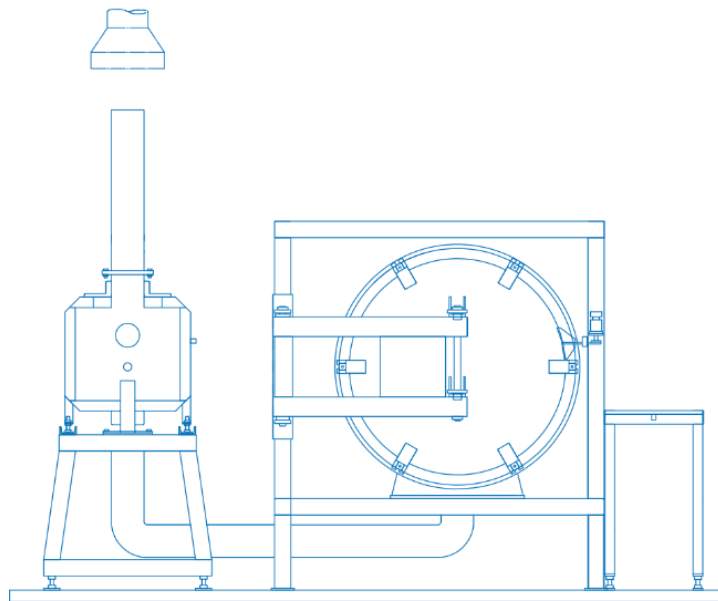

Specifications

Technical Features	
Effective volume:	60, 200, 300, 500 liter
Throughput:	-
Heating:	Electric
Atmosphere:	Nitrogen and HNO ₃
Temperatures:	200 °C

Applications

Debinding of MIM casted components

Additional Equipment Modules

+ Automation	
--------------	--

Foto Gallery



Contact:

CREMER Thermoprozessanlagen GmbH

Auf dem Flabig
D-52355 Düren
Germany

Tel.: +49 - 2421 - 968 30 0
Fax.: +49 - 2421 - 6 37 35

info@cremer-ofenbau.de
www.cremer-ofenbau.de